

FEATURE HIGHLIGHTS



- Up to 8 10/100/1000 BASE-T(X) RJ45 ports or 1000 BASE-X SFP slots.
- Up to 8 802.3af/ 802.3at Power over Ethernet ports, with maximum 30W PoE power per port and maximum 240 W device power budget.
- Powerful Switching Platform, supporting Redundancy advanced Protocols, such as ERPS, RSTP, STP, MRP (Client) and compatible rings.
- Profinet Conformance Class B compatible & Ethernet/IP Ready
- IEEE 1588v2 Precision Time Protocol Hw-Based Transparent clock
- Works from -20°C~70°C

PRODUCT DESCRIPTION

The EHG7504/EHG7508 Series is an Industrial Grade Managed Gigabit Ethernet PoE Switch. Designed to provide a highly reliable, fault-tolerant, extremely fast network connection in a harsh environment, EHG7504/EHG7508 Series equips two terminal blocks to provide dual redundant power inputs with Reverse Polarity Protection and allows field engineers to build up a stand-alone fault alarm system.

Within its compact DIN-Rail housing design, the EHG7504/EHG7508 series **allows you to choose between different port combinations: 10/100/1000 BASE-T(X) RJ45 port, 1000 BASE-X SFP port and IEEE 802.3af/at complaint PoE RJ45.** EHG7504/08 provide, in its 8-PoE-Port Version, up to **240W power budget.**

This is the right choice if you want to set up a Reliable network environment with its intelligent features and keep equipment connected all the time, even in case of temporary network breakdowns through **RSTP, ERPS Rings and MRP (client) redundancy.** Being multiple Compatible Rings also supported, ATOP can be the best choice to have a painless enhancement of an existing infrastructure that doesn't jeopardize network Topology and existing working pattern.

And that's not all. **Designed specifically for Automation, it is Profinet CC-B and Ethernet/IP compatible,** MAC-based Black List/ White List, IEEE 802.1x, RADIUS, TACACS+, etc., and keep your network safe.


EHG7604/EHG7608 Series : built tough.

SPECIFICATIONS

Technical Specifications	
Model Name	EHG7504 EHG7508
Switch Properties	
Priority Queues	8
VLAN Table	4096
MAC-Based VLAN	512
VLAN ID Range	VID 1 to 4094
Trunk Group	4
Static IGMP Groups	128
Dynamic IGMP Groups	256
MAC Table Size	16K
Packet Buffer Size	1.5 MB
Jumbo Frame	9216 Byte
Ethernet	
Standards	IEEE 802.3af / 802.3at for Power-over-Ethernet IEEE 802.3 for 10BASE-T IEEE 802.3u for 100BASE-T(X) IEEE 802.3ab for 1000BASE-T IEEE 802.3z for 1000BASE-X IEEE 802.3x for Flow Control IEEE 802.1d-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1q/p for VLAN Tagging and Class of Service IEEE 8021x for Authentication IEEE 802.3ad for Port Trunk with LACP IEEE 802.3az for Energy Efficient Ethernet
Protocols	IPv4, IPv6, IGMPv1/v2/v3, GARP,GMRP, GVRP, SNMPv1/v2c/v3, SNMP Inform, ICMP, Telnet, SSH, DHCP Server/Relay/Client, DHCP Option 66/67/82, BootP, RARP, TFTP, NTP Server/Client, SNTP, SMTP, SMTP (Gmail), RMON, HTTP, HTTPS, Syslog, MRP (Client), LLDP, IEEE 1588 PTP V1/V2, IEEE 1588 Hardware Transparent Clock, 802.1x, EAP, RADIUS, TACACS+, Mirror port, QoS, ACL, Serial Console, U-Ring, STP, RSTP, MSTP, Redundancy Compatible Ring
Automation Profiles	Profinet, Ethernet/IP, Modbus/TCP
SNMP MIB	MIB II, IF-MIB, SNMPv2 MIB, BRIDGE-MIB, RMON MIB Group 1,2,3,9, RFC 1157, RFC 1213, RFC 1215, RFC 1493, RFC 1643, RFC 1757, RFC 2011, RFC 2012, RFC 2013, RFC 2233, RFC 2571, RFC 2742, RFC 2819, RFC 2863, RFC 3411, RFC 3412, RFC 3413, RFC 3414, RFC 3415,
Power	
Input Voltage	9-57 VDC for Non-PoE models 45-57 VDC for 802.3af mode 51-57 VDC for 802.3at mode
Input Current (System)	Max. 1.4A @ 9VDC (without PoE) Max. 2.9A @ 45VDC (Support up to 8 ports at 15.4W per PoE port) Max. 5.0A @ 51VDC (Support up to 8 ports at 30W per PoE port)
Power Consumption (System)	Max 12.6 W @9 VDC (without PoE) Max 130.5 W @45VDC (802.3af, with 15.4W PoE per port for 8 ports) Max 255 W @51VDC (802.3at, with 30W PoE per port for 8 ports)

Connector Reverse Polarity Protection	5-Pin 5.08mm Lockable Terminal Block Yes
Interfaces	
RJ45 Ports Fiber Optics Ports LED Indicators Console Relay Output DIP Switches Button	Up to 8 10/100/1000BASE-T(X) auto negotiation speed Up to 4 1000BASE-X SFP slot PWR1, PWR2, Alarm, Run, Ring, Ring Master, RJ-45 Link/Speed, SFP Link, PoE RS232 (RJ45 connector) 2 relay outputs with current carrying capacity of 1A @ 24 VDC Ring Control and Profinet Setting Reset Button
Physical Characteristics	
Housing Dimension (W x H x D) Weight Installation	IP30 aluminum housing 54 x 113 x 145 mm 800g DIN-Rail , Wall mount (optional kit)
Environmental Limits	
Operating Temperature Storage Temperature Ambient Relative Humidity	-20°C~70°C (-4°F~158°F) -40°C~85°C (-40°F~185°F) 5%~95%, 55°C (Non-condensing)

DIMENSIONS & LAYOUT

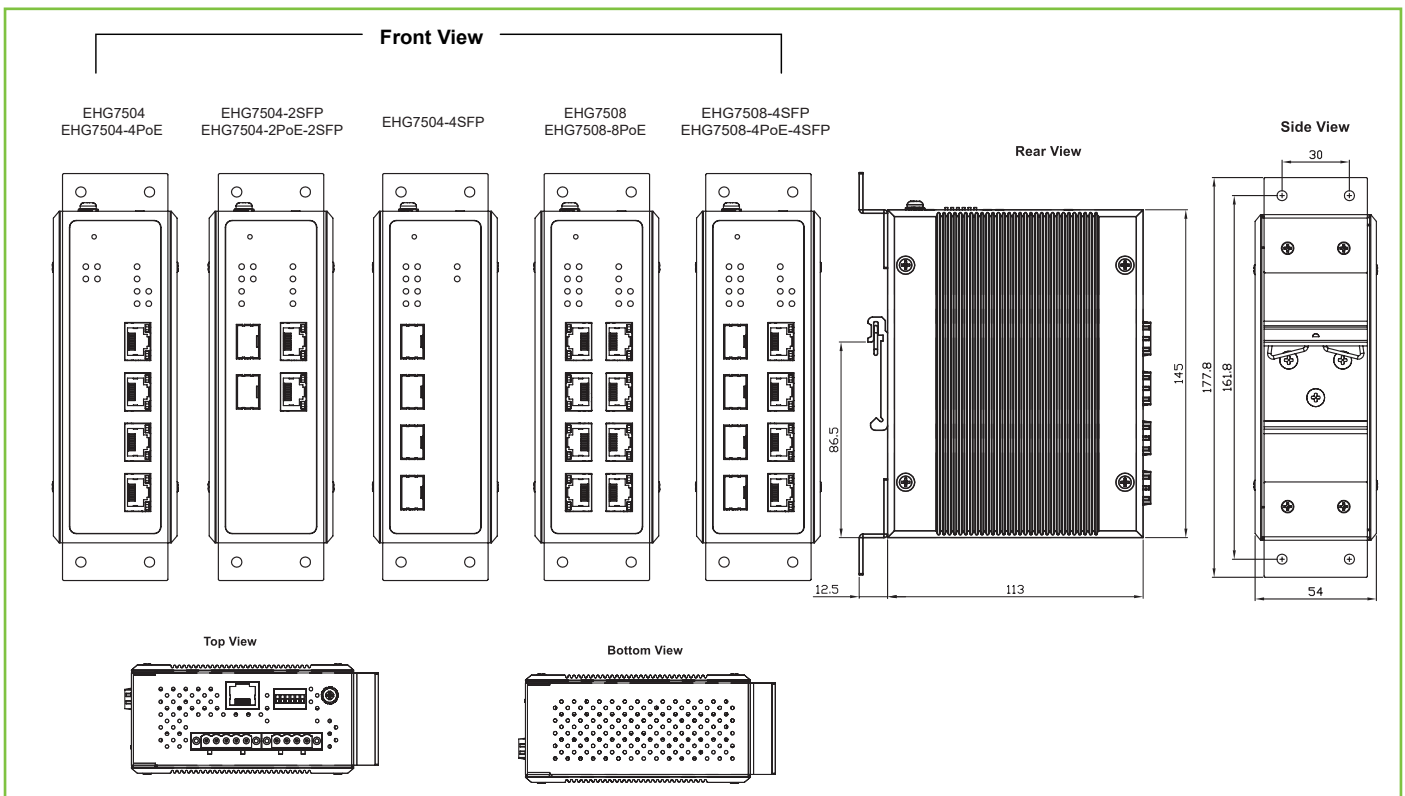

REGULATORY APPROVALS

Regulatory Approvals				
Safety	UL 60950-1 2nd Ed. /CSA C22.2 No.60950-1-07 2nd Ed. / EN 60950-1 / CB			
EMC	FCC Part 15, Subpart B, Class A EN 55032, EN 55024, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 61000-6-4,			
Test	Item	Value	Level	
IEC 61000-4-2	ESD	Contact Discharge	±6kV	3
		Air Discharge	±8kV	3
IEC 61000-4-3	RS	80-1000MHz	10(V/m)	3
		1.4-2.0GHz	3(V/m)	3
		2.0-2.7GHz	10(V/m)	3
IEC 61000-4-4	EFT	AC Power Port	±2.0kV	3
		DC Power Port	±2.0kV	3
		Signal Port	±1.0kV	3
IEC 61000-4-5	Surge	DC Power Port	Line-to Line±1.0kV	3
		DC Power Port	Line-to Earth±2.0kV	3
		Signal Port	Line-to Earth±2.0kV	3
IEC 61000-4-6	CS	0.15-80MHz	10V rms	3
IEC 61000-4-8	PFMF	Enclosure	30 V/m	4
IEC 61000-4-11	DIP	AC Power Port	-	A
Shock Drop Vibration	MIL-STD-810G Method 516.5 MIL-STD-810F Method 516.5 MIL-STD-810F Method 514.5 C-1 & C-2			
RoHS II	Yes			
MTBF	20 Years			

ORDERING INFORMATION

Ordering information

Model name	Part Number	RJ45 (non-PoE)	RJ45 (PoE)	SFP
EHG7504	1P1EHG75040002G	4	0	0
EHG7504-4PoE	1P1EHG75040003G	0	4	0
EHG7504-2SFP	1P1EHG75040004G	2	0	2
EHG7504-4SFP	1P1EHG75040005G	0	0	4
EHG7504-2PoE-2SFP	1P1EHG75040001G	0	2	2
EHG7508	1P1EHG75080002G	8	0	0
EHG7508-8PoE	1P1EHG75080003G	0	8	0
EHG7508-4SFP	1P1EHG75080004G	4	0	4
EHG7508-4PoE-4SFP	1P1EHG75080001G	0	4	4

Optional Accessories

Model name	Part Number	Description
WMK-450-Black	70100000000052G	Aluminum wall mount kit
CBL-RJ45(8P)-DB9(F)-90-C	50891971G	RJ45 to DB9 Female Cross Over Console Cable, 90cm
SDR-75-24	50500752240001G	75W/3.2A DIN-Rail 24VDC power supply 88~264VAC / 124~370VDC input
SDR-240-48	50502401480001G	240W/5A DIN-Rail 48VDC power supply 88~264VAC / 124~370VDC input
LM28-C3S-TI-N	50708031G	SFP Transceiver, 1250Mbps, 850nmVCSEL, Multi-mode, 550m, 3.3V, -20~85°C
LM38-C3S-TI-N	50709411G	SFP Transceiver, 1250Mbps, 1310nmFP, Multi-mode, 2km, 3.3V, -40~85°C
LS38-C3S-TI-N	50709391G	SFP Transceiver, 1250Mbps, 1310nmFP, Single-mode, 10km, 3.3V, -40~85°C
LS38-C3L-TI-N	50709441G	SFP Transceiver, 1250Mbps, 1310nmDFB, Single-mode, 30km, 3.3V, -40~85°C
LS38-C3L-TI-N	50709441G	SFP Transceiver, 1250Mbps, 1310nmDFB, Single-mode, 30km, 3.3V, -40~85°C