



8-Port and 16-Port Industrial Serial Device Server

■ SE5408A/SE5408A2/SE5416A/SE5416A2

RoHS compliant

- Standard 19-inch rack-mount high metal housing
- Industrial EMC protection
- TCP Server/Client, UDP, Virtual COM and Tunneling modes supported
- Dual 10/100Mbps Ethernet for networking redundancy
- Remotely monitor, manage, and control industrial field devices
- Configuration via Web Browser / Serial Console / Telnet Console / Windows Utility
- Relay out indicator for Network link-status
- LCM display with 4-key touch pad for configuration
- Remote firmware upgrade
- Isolation (Specific models only)
- Adjustable termination & pull high/low resistors

Make Serial Devices Ready to the Network

The Industrial Serial Device Server is a gateway between Ethernet (TCP/IP) and serial signal communications; allowing almost any serial device to be connected to a new or existing Ethernet network.

By encapsulating serial data and transporting it over Ethernet, the Serial Device Server offers full-duplex and bi-directional data seamlessly between the serial ports and the Ethernet network.


Easy to Use

Flexible configuration options enable this unit to be setup over Ethernet by Telnet, Web browser, Serial Console, or our Windows utilities. Packed in a rugged metal housing with 19-inch rack mount and 100~240VAC or 24-48VDC wide power input range.


Specially Designed for Automation Fields

In industrial and manufacturing automation fields, The Serial Device Server is used as a field device to connect the Ethernet through TCP/IP protocol directly. It is also specially designed for conjunction with PLCs, HMIs, Barcode Scanners, Data Terminals, Electronic Kanbans, Shop Floor Control Systems, and Pick-to-Light Systems.

SE5408A Front Panel

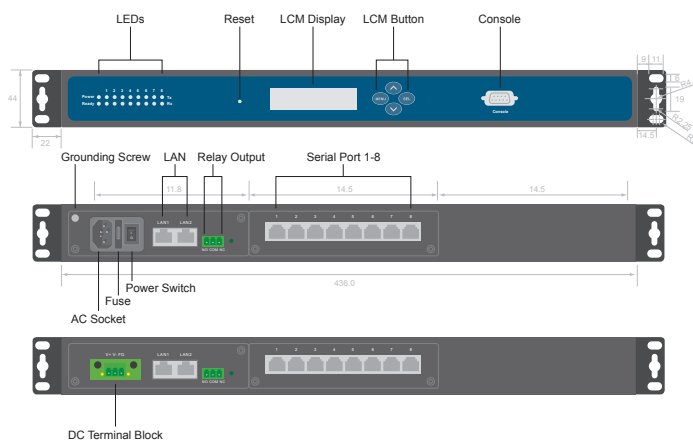

SE5416A Front Panel

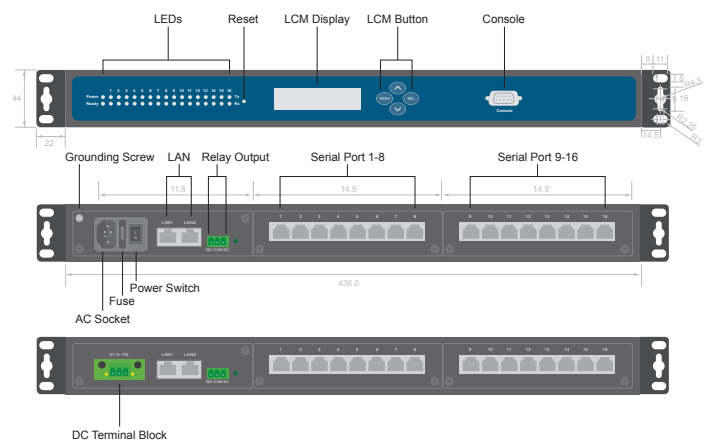

8-Port and 16-Port Industrial Serial Device Server

 SE5408A/SE5408A2/SE5416A/SE5416A2

Specifications	
Network Interface	
Ethernet Port	2x RJ-45
Compliance	IEEE 802.3 10BASE-T / IEEE 802.3u 100BASE-TX
Serial Interface	
Connector	RJ-45
Ports	8 or 16 Ports
Mode	RS-232 or RS-422/485
Baud Rate	50~921,600 bps
Parity	None, Odd, Even, Space, Mark
Data Bits	5,6,7,8
Stop Bits	1,2
Flow Control	None, Xon/Xoff, RTS/CTS (RS-232 only)
*Isolation	2.5 KV (Specific models only)
Power Characteristics	
Connector	IEC 60320-1 C14 AC Power Inlet (AC models) / 5.08mm 3-pin Lockable Terminal Block (DC models)
Input Voltage	100-240 VAC (AC models) / 24-48 VDC (DC models)
Power Consumption (max.)	0.21A @100 VAC / 0.54A @24 VDC
Power Redundancy	No
Reverse Polarity Protection	Yes (DC Input only)
Mechanicals	
Dimensions(W x H x D)	436 mm x 43.5 mm x 200 mm
Installation	19" Rack Mount
Reset Button	Yes
Weight	3.2kg (16 ports) / 3.0 kg (8 ports)
Environmental Limits	
Operating Temperature	-20°C ~ 70°C (-4°F ~ 158°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 ~ 95% RH, (non-condensing)
Software	
Protocols	IPv4, ICMP, TCP, UDP, DHCP Client, SNMP, HTTP, Telnet, RFC2217, NTP, DNS, SMTP, Syslog
Configuration	Serial Manager, Web UI, Serial console, Telnet
Virtual COM	Windows / Linux redirection software
Link Modes	
TCP Server	4-connection mode supports Raw Data, Virtual COM or Reverse Telnet
TCP Client	Dual destinations support Raw Data or Virtual COM
UDP	Up to 8 ranges of IPs
Warranty	5 years

Ordering Information		
Model Name	P/N	Description
SE5416A Isolation	1P1SE5416A0001G	16-Port Industrial Serial Device Server, RS-232, AC Inlet, US Plug, Rack Mount
SE5416A2	1P1SE5416A2001G	
SE5416A-DC Isolation	1P1SE5416A0002G	16-Port Industrial Serial Device Server, RS-232, DC TB3, Rack Mount
SE5416A2-DC	1P1SE5416A2002G	
SE5416A-S5 Isolation	1P1SE5416A0003G	16-Port Industrial Serial Device Server, RS-422/485, AC Inlet, US Plug, Rack Mount
SE5416A2-S5	1P1SE5416A2003G	
SE5416A-S5-DC Isolation	1P1SE5416A0004G	16-Port Industrial Serial Device Server, RS-422/485, DC TB3, Rack Mount
SE5416A2-S5-DC	1P1SE5416A2004G	
SE5416A-EU Isolation	1P1SE5416A0011G	16-Port Industrial Serial Device Server, RS-232, AC Inlet, EU Plug, Rack Mount
SE5416A2-EU	1P1SE5416A2011G	
SE5416A-S5-EU Isolation	1P1SE5416A0013G	16-Port Industrial Serial Device Server, RS-422/485, AC Inlet, EU Plug, Rack Mount
SE5416A2-S5-EU	1P1SE5416A2013G	
SE5408A Isolation	1P1SE5408A0001G	8-Port Industrial Serial Device Server, RS-232, AC Inlet, US Plug, Rack Mount
SE5408A2	1P1SE5408A2001G	
SE5408A-DC Isolation	1P1SE5408A0002G	8-Port Industrial Serial Device Server, RS-232, DC TB3, Rack Mount
SE5408A2-DC	1P1SE5408A2002G	
SE5408A-S5 Isolation	1P1SE5408A0003G	8-Port Industrial Serial Device Server, RS-422/485, AC Inlet, US Plug, Rack Mount
SE5408A2-S5	1P1SE5408A2003G	
SE5408A-S5-DC Isolation	1P1SE5408A0004G	8-Port Industrial Serial Device Server, RS-422/485, DC TB3, Rack Mount
SE5408A2-S5-DC	1P1SE5408A2004G	
SE5408A-EU Isolation	1P1SE5408A0011G	8-Port Industrial Serial Device Server, RS-232, AC Inlet, EU Plug, Rack Mount
SE5408A2-EU	1P1SE5408A2011G	
SE5408A-S5-EU Isolation	1P1SE5408A0013G	8-Port Industrial Serial Device Server, RS-422/485, AC Inlet, EU Plug, Rack Mount
SE5408A2-S5-EU	1P1SE5408A2013G	
Optional Accessories		
Power Adapter-AD17-24C (US-Y)	50500151240002G	Y-Type power adaptor,100-240VAC input, 0.6A @ 24VDC output, US plug
Power Adapter-AD17-24D (EU-Y)	50500151240012G	Y-Type power adaptor,100-240VAC input, 0.6A @ 24VDC output, EU plug
ADP-DB9(F)-TB5	59906231G	Female DB9 to Female 3.81mm TB5 Converter
CBL-RJ45(8P)-DB9(M)-90	50891781G	RJ45 to DB9 Male Cable, 90cm
CBL-RJ45(8P)-DB9(M)-200	50891951G	RJ45 to DB9 Male Cable, 200cm
CBL-RJ45(8P)-DB9(F)-90	50891791G	RJ45 to DB9 Female Cable, 90cm
CBL-RJ45(8P)-DB9(F)-90-C	50891971G	RJ45 to DB9 Female Cross Over Cable, 90cm
CBL-RJ45(8P)-DB9(F)-200-C	50891961G	RJ45 to DB9 Female Cross Over Cable, 200cm
RMK-718-Black	7010000000040G	Rack Mount Mounting-Kit, Black
Power Cable (US)	50801041G	6 feet Power Cable, US
Power Cable (EU)	50801051G	6 feet Power Cable, EU
Fuse	59907561G	250V, 2A, 20mm (length) * 5mm (diameter)

Regulatory Approvals					
EMI	EN 55022: 2010, EN 55024: 2010, FCC Part 15B, Class A				
EMS					
Test	Item	Value	Level	Criteria	
IEC 61000-4-2	ESD	Enclosure Contact	8 kV	4	B
		Enclosure Air	15 kV		B
IEC 61000-4-3	RS	Enclosure Ports	10 V/m	3	A
IEC 61000-4-4	EFT	Signal Ports	2 kV	4	B
		DC Power Ports	2 kV	3	B
		AC Power Ports	4 kV	4	B
IEC 61000-4-5	Surge	Signal Ports	2 kV line-to-earth	3	A *
		Signal Ports	2 kV line-to-earth	3	B ▲
		DC Power Ports	1 kV line-to-earth, 1 kV line-line	2	A
		AC Power Ports	4 kV line-to-earth, 2 kV line-line	4	B
IEC 61000-4-6	CS	Signal Ports	10 V	3	A
		DC Power Ports			
		AC Power Ports			
IEC 61000-4-8	PFMF	Enclosure Ports	10 A/m continuous	3	A
IEC 61000-4-11	Dip	AC Power Ports	Dips: >95% dip, 30% reduction	-	A
			Interruptions: >95%	-	B
Safety	EN 60950-1:2011				
Shock	IEC 60068-2-27				
Freefall	IEC 60068-2-32				
Vibration	IEC 60068-2-6				
MTBF	TBD				
RoHS II	Yes				

* For SE5408A /SE5416A Series

▲ For SE5408A2 /SE5416A2 Series

Atop Technologies, Inc.

TEL : +886-3-5508137

FAX : +886-3-5508131

sales@atop.com.tw

http : //www.atop.com.tw

Design and specification are subjected to change without notice.

All product names referenced herein are registered trademarks of their respective companies.

