



FEATURE HIGHLIGHTS

- 6 X 10/100/1000 BASE-T(X) RJ45 ports
- 2 x 10/100/1000 BASE-T(X) RJ45 ports or 2 x 100/1000 BASE-X SFP slots with MACsec encryption support
- 99% of throughput guaranteed no additional latency
- Ideal for a plug-and-play local area network protection. Embedded MACsec Key Agreement offers high-protection with no configuration.
- IP30 aluminum housing, DIN-Rail or Wall mount
- Prioritizes Profinet Packets according to 802.1q
- Operational between -20°C~70°C


PRODUCT DESCRIPTION

As more and more devices come online and networks open to the internet to make operational and communication gains with IIoT-based services, security has become paramount for ensuring that your network's traffic stays between your devices, with network vulnerabilities including unauthorized data access and unauthorized network commands, risking loss of data and operational downtimes.

Featuring 6 x Gigabit RJ45 ports and the choice between 2 x Secure Gigabit RJ45 ports or 2 x Secure Gigabit SFP uplink slots, ATOP's EHG2408 switch series provides a plug-and-play solution for fast, reliable network switching that offers increased network security through MACsec encryption.

Providing point-to-point security on Ethernet links between nodes, MACsec uses GCM-AES to ensure the integrity of all network traffic. This means it can secure a network from a whole host of security threats, including intrusion, man-in-the-middle, masquerading, passive wiretapping, and playback attacks. And because MACsec encryption is hardware-based, there is no added latency.

With its modern, slim, and flat design to minimize surface area usage, the EHG2408 series is ideal for demanding industrial applications that require compact solutions while delivering high network performance. Supporting a wide operating temperature range of -20°C to 70°C and being compliant with essential sections of EN 60950, UL/IEC 60950, EN/IEC(CB)/UL62368-1, and MIL-STD-810F, the EHG2408 switch series is a powerful compact device that can perform under a variety of environmental conditions, such as power input voltage, shock, drop and vibration.

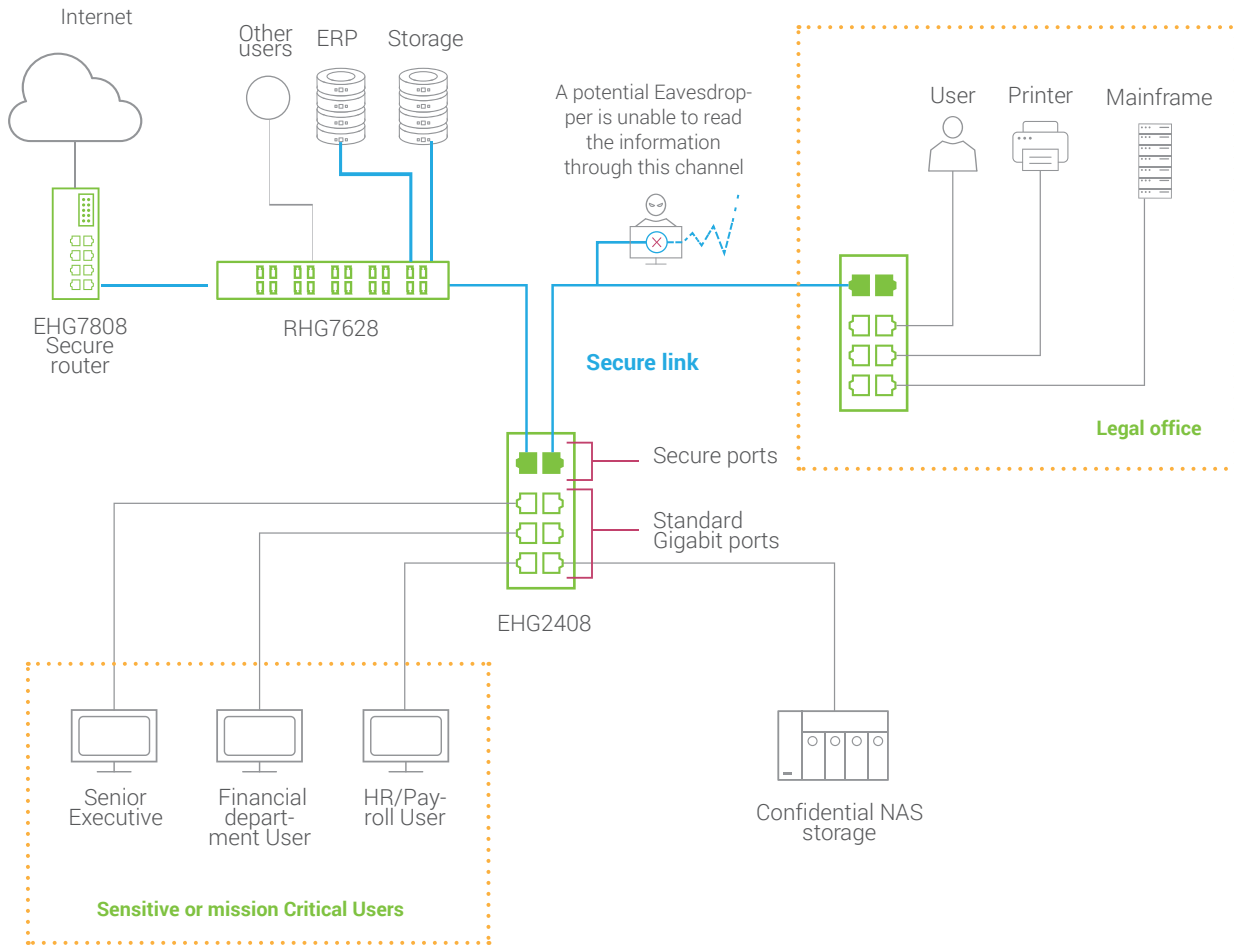

SPECIFICATIONS

Technical Specifications

Model Name EHG2408 Series

Switch Properties

Processing Scheme Store-and-forward
 MAC Address Table 16 k
 Packet Buffer Size 2 Mbit
 Jumbo Frame 10 kByte


Ethernet

Standards

IEEE 802.3 for 10 BaseT
 IEEE 802.3u for 100 Base T(X)
 IEEE 802.3u for 100 Base F(X)
 IEEE 802.3ab for 1000 Base T(X)
 IEEE 802.3ab for 1000 Base T
 IEEE 802.3z for 1000 Base-X
 IEEE 802.3x for Flow Control, back pressure flow control
 IEEE 802.3az for Energy Efficient Ethernet
 IEEE 802.1q for VLAN tagging (Prioritization of Profinet Packets)
 IEEE 802.1p for CoS (Prioritization of Profinet Packets)
 IEEE 802.1ae for MACsec

Flow Control	Back pressure and pause frame-based flow control schemes
Transmission Rate	RJ45: 10/100/1000 Mbps SFP: 100/1000 Mbps
Auto MDI/MDI-X	Yes
Power	
Input Voltage	9~48 VDC, dual power input
Input Current (System)	0.64 A Max
Power Consumption (System)	5.8 W Max
Power input	5-pin Terminal block
LED	
Indication	P1, P2, Fault
Physical Characteristics	
Housing Dimension (W x H x D) Weight Installation	IP30 aluminum housing 45.3mm x 89.6mm x 110mm 400g DIN-Rail , Wall mount (optional kit)
Environmental Limits	
Operating Temperature Storage Temperature Ambient Relative Humidity	-20°C~70°C (-4°F~158°F) -40°C~85°C (-40°F~185°F) 5%~95%, 55°C (Non-condensing)

DIMENSIONS & LAYOUT

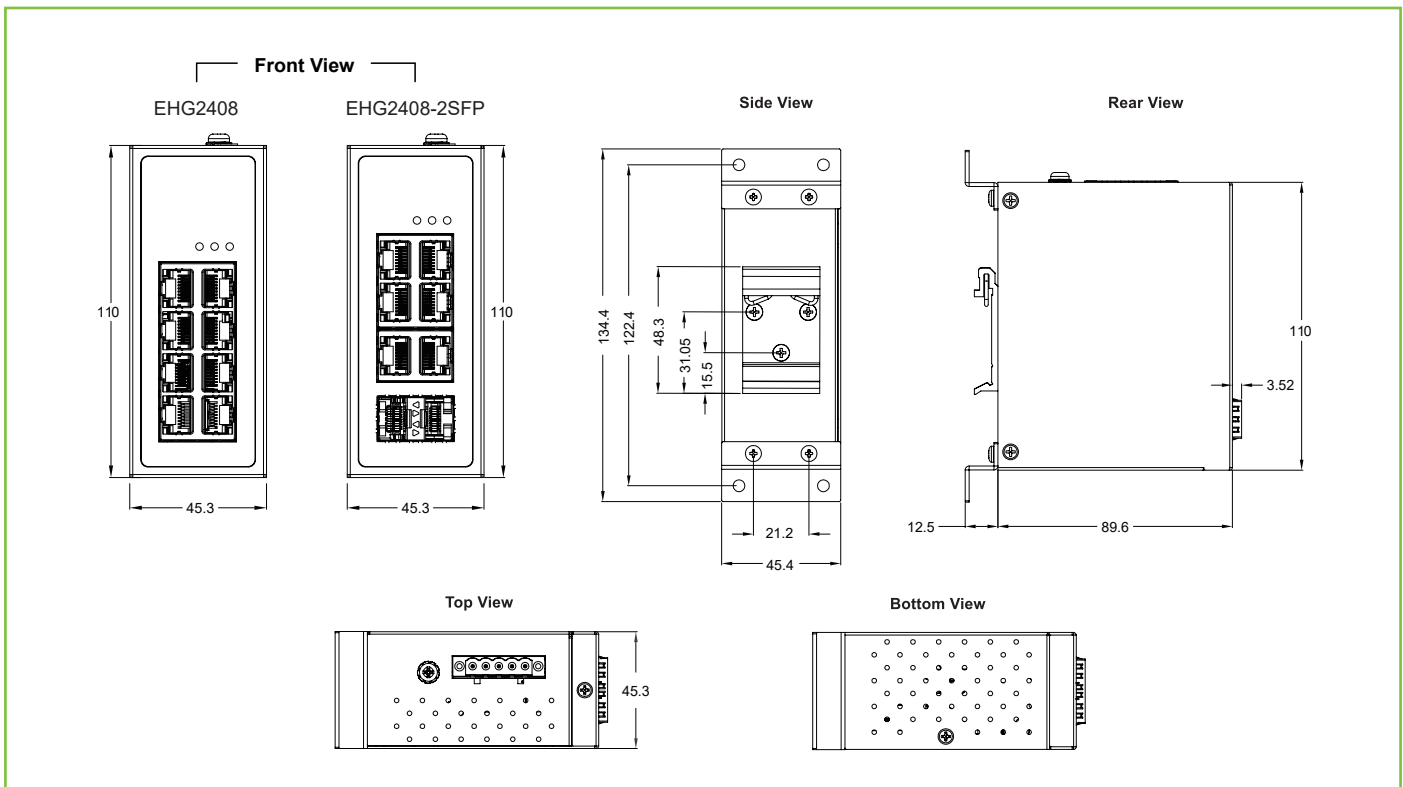

REGULATORY APPROVALS

Regulatory Approvals				
Test	Item	Value	Level	
Safety	EN60950-1:2006, UL/IEC(CB) 60950-1:2006, UL 62368-1 / IEC 62368-1 / EN62368-1			
EMC	FCC Part 15, Subpart B, Class A, Class B EN 55032:2015 + AC:2016 (Class B, EN55024), EN 61000-6-2, EN 61000-6-4,			
IEC 61000-4-2	ESD	Contact Discharge Air Discharge	±8kV ±15kV	4 4
IEC 61000-4-3	RS	80-1000MHz 1.4-2.0GHz 2.0-2.7GHz	10(V/m) 3(V/m) 1(V/m)	3 3 3
IEC 61000-4-4	EFT	AC Power Port DC Power Port Signal Port	±2.0kV ±2.0kV ±1.0kV	3 3 3
IEC 61000-4-5	Surge	DC Power Port DC Power Port Signal Port Signal Port	Line-to Line±1.0kV Line-to Earth±2.0kV Line-to Line±1.0kV Line-to Earth±2.0kV	3 3 3 3
IEC 61000-4-6	CS	0.15-80MHz	10V rms	3
IEC 61000-4-8	PFMF	Enclosure	30A/m	3
IEC 61000-4-11	DIP	AC Power Port	-	-
Shock Drop Vibration	MIL-STD-810F Method 516.5, IEC 60068-2-27 MIL-STD-810F Method 516.5, IEC 60068-2-32 MIL-STD-810F Method 514.5 C-1 & C-2, IEC 60068-2-6			
RoHS II	Yes			
MTBF	25.83 years (@25 degrees C, according to MIL-HDBK-217F)			
Warranty	5 years			

ORDERING INFORMATION

Ordering information

Model name	Part Number	Unencrypted RJ45 ports	MACsec encrypted ports	
			RJ45 ports	SFP slots
EHG2408	1P1EHG24080001G	6	2	-
EHG2408-2SFP	1P1EHG24080002G	6	-	2

Optional Accessories

Model name	Part Number	Description
Wall Mount set	70100000000056G	45.4 x22.8 x1.5 Aluminum wall mount with screw
LM38-A3S-TI-N	50708051G	SFP Transceiver, 155Mbps, 1310nmLED, Multi-mode, 2km, 3.3V, -40~85°C
LS38-A3S-TI-N	50709431G	SFP Transceiver, 155Mbps, 1310nmFP, Single-mode, 30km, 3.3V, -40~85°C
LM28-C3S-TI-N	50708031G	SFP Transceiver, 1250Mbps, 850nmVCSEL, Multi-mode, 550m, 3.3V, -20~85°C
LM38-C3S-TI-N	50709411G	SFP Transceiver, 1250Mbps, 1310nmFP, Multi-mode, 2km, 3.3V, -40~85°C
LS38-C3S-TI-N	50709391G	SFP Transceiver, 1250Mbps, 1310nmFP, Single-mode, 10km, 3.3V, -40~85°C
LS38-C3L-TI-N	50709441G	SFP Transceiver, 1250Mbps, 1310nmDFB, Single-mode, 30km, 3.3V, -40~85°C
SDR-75-24	50500752240001G	AC 88~264V to 24V DC 3.2A; 75W